
Standard Accessories







Electrical cabinet



Auto centralized lubrication system

Optional Accessories




Carousel type ATC (for H model)




Rear chip wash (only available for full enclosure)



4th axis rotary table

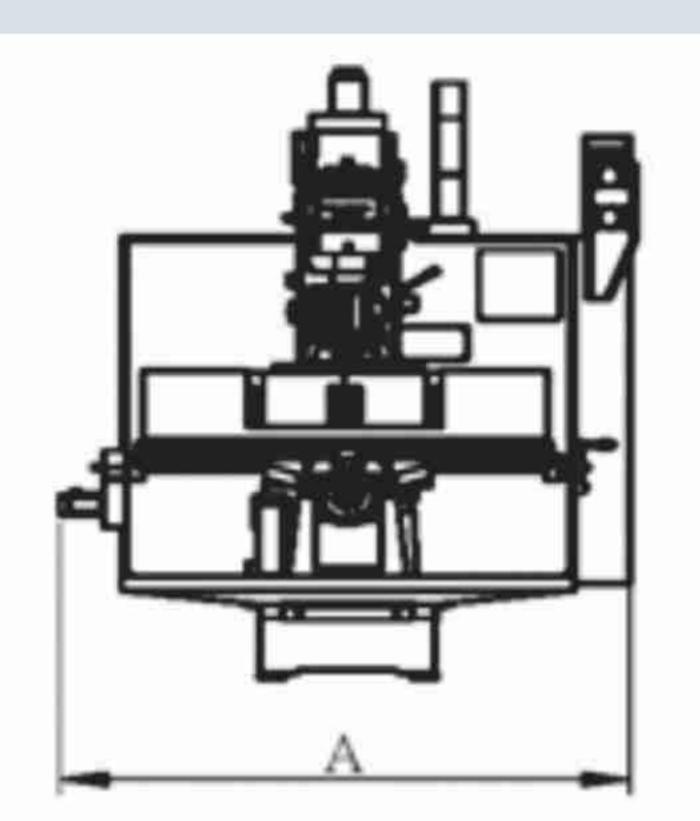

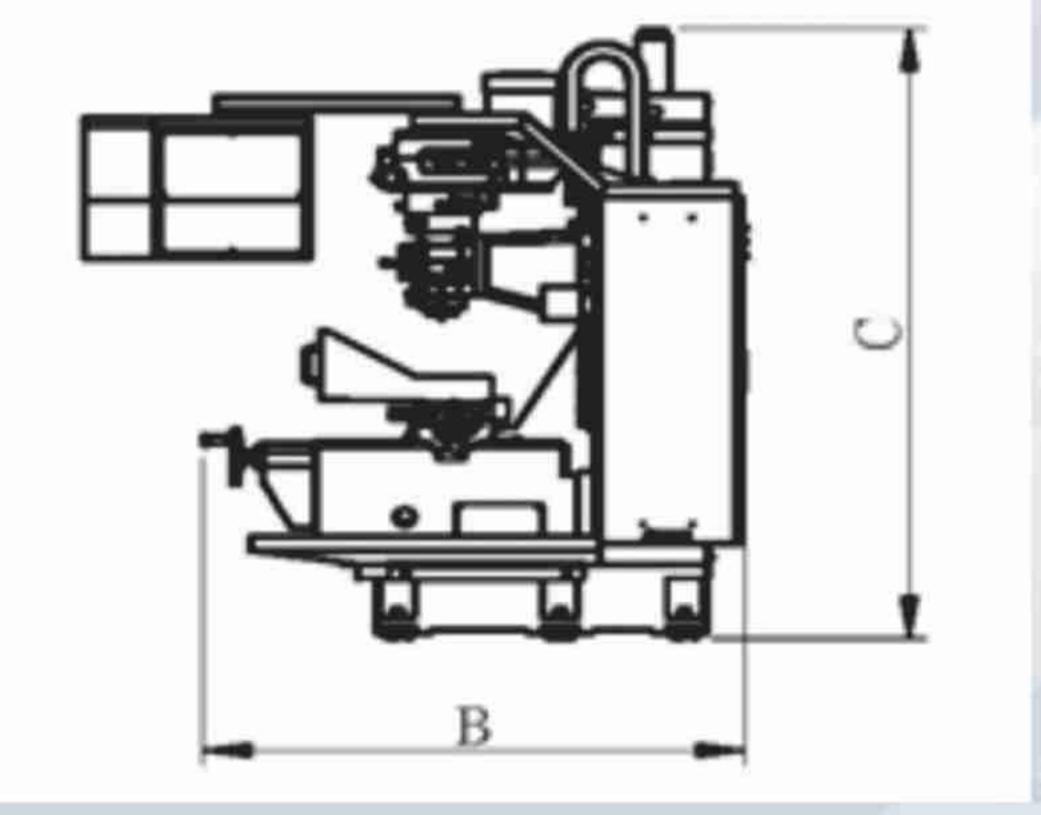

SPECIFICATION:

Model	A1-3T	A1-5T	A2-5T	A2-5/7/10H	A3-5T	A3-5/7/10H	
Spindle motor	3HP	5HP	5HP	5/7.5/10 HP	5HP	5/7.5/10 HP	
Table	9"x49"		10"x54"		13"x60"	13"x60"	
X axis Travel	28.34"		33.07"		39.37"	39.37"	
Y axis Travel	15.74"		19.68"				
Z axis Travel	19.68"		24.01"	27.95"	24.01"	25.19"	
Spindle taper	R8/NT30	NT40	NST40	CAT40/BT40	NT40	CAT40/BT40	
Quill diameter	ø3.37	ø3.93	ø3.93		ø3.93		
Quill travel	5"			-	5"		
Spindle rpm (Lo)	70~500		70~500	8000	70~500	8000	
Spindle rpm (Hi)	600~5000		-1.		600~5000		
Table load capacity (lbs)	88	80		1100			
T-slot (WxNxP)	0.62"x3"x2.55"						
Spindle nose to table top	3.93"~23.62"		3.93"~27.95"	3.93"~31.88" 3.93"~27.95" 3.93"~29.13			
Saddle size	20"				47.2"		
Machine weight (lbs)	3770		4550		4600		
Machine Dimension (AxBxC)	69"x66"x86"		77"x70"x95"	77"x70"x103"	91"x70"x95"	91"x70"x103"	

We reserve the right to change design, color or specification without notice. Standard accessories

Tools and box

Operational manual

Coolant system

Work light

Leveling bolts and plate

Splash guard

Auto lube

15" LCD

60GB SSD


Table guard (A3 model)

Metal way cover on Y axis (A3 model)
Half enclosed splash guard (A3 model)



670 Union Ave.
Pomona, CA 91768
U.S.A.
TEL:(909)623-6887
FAX:(909)922-7596

Toll Free Hot Line: 1-877-4-Atrump (287867)
http://www.atrump.com
E-mail:atrump@atrump.com

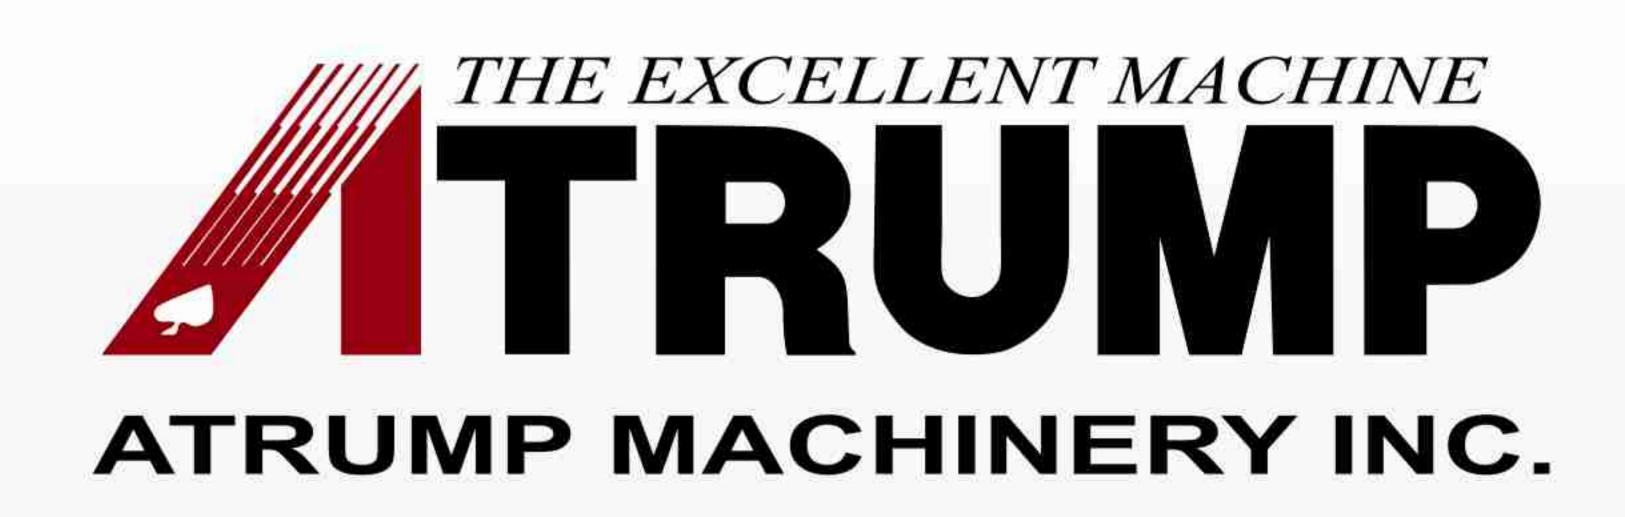


CNC Bed Mill A SERIES





Heavy cutting ability and affordable price

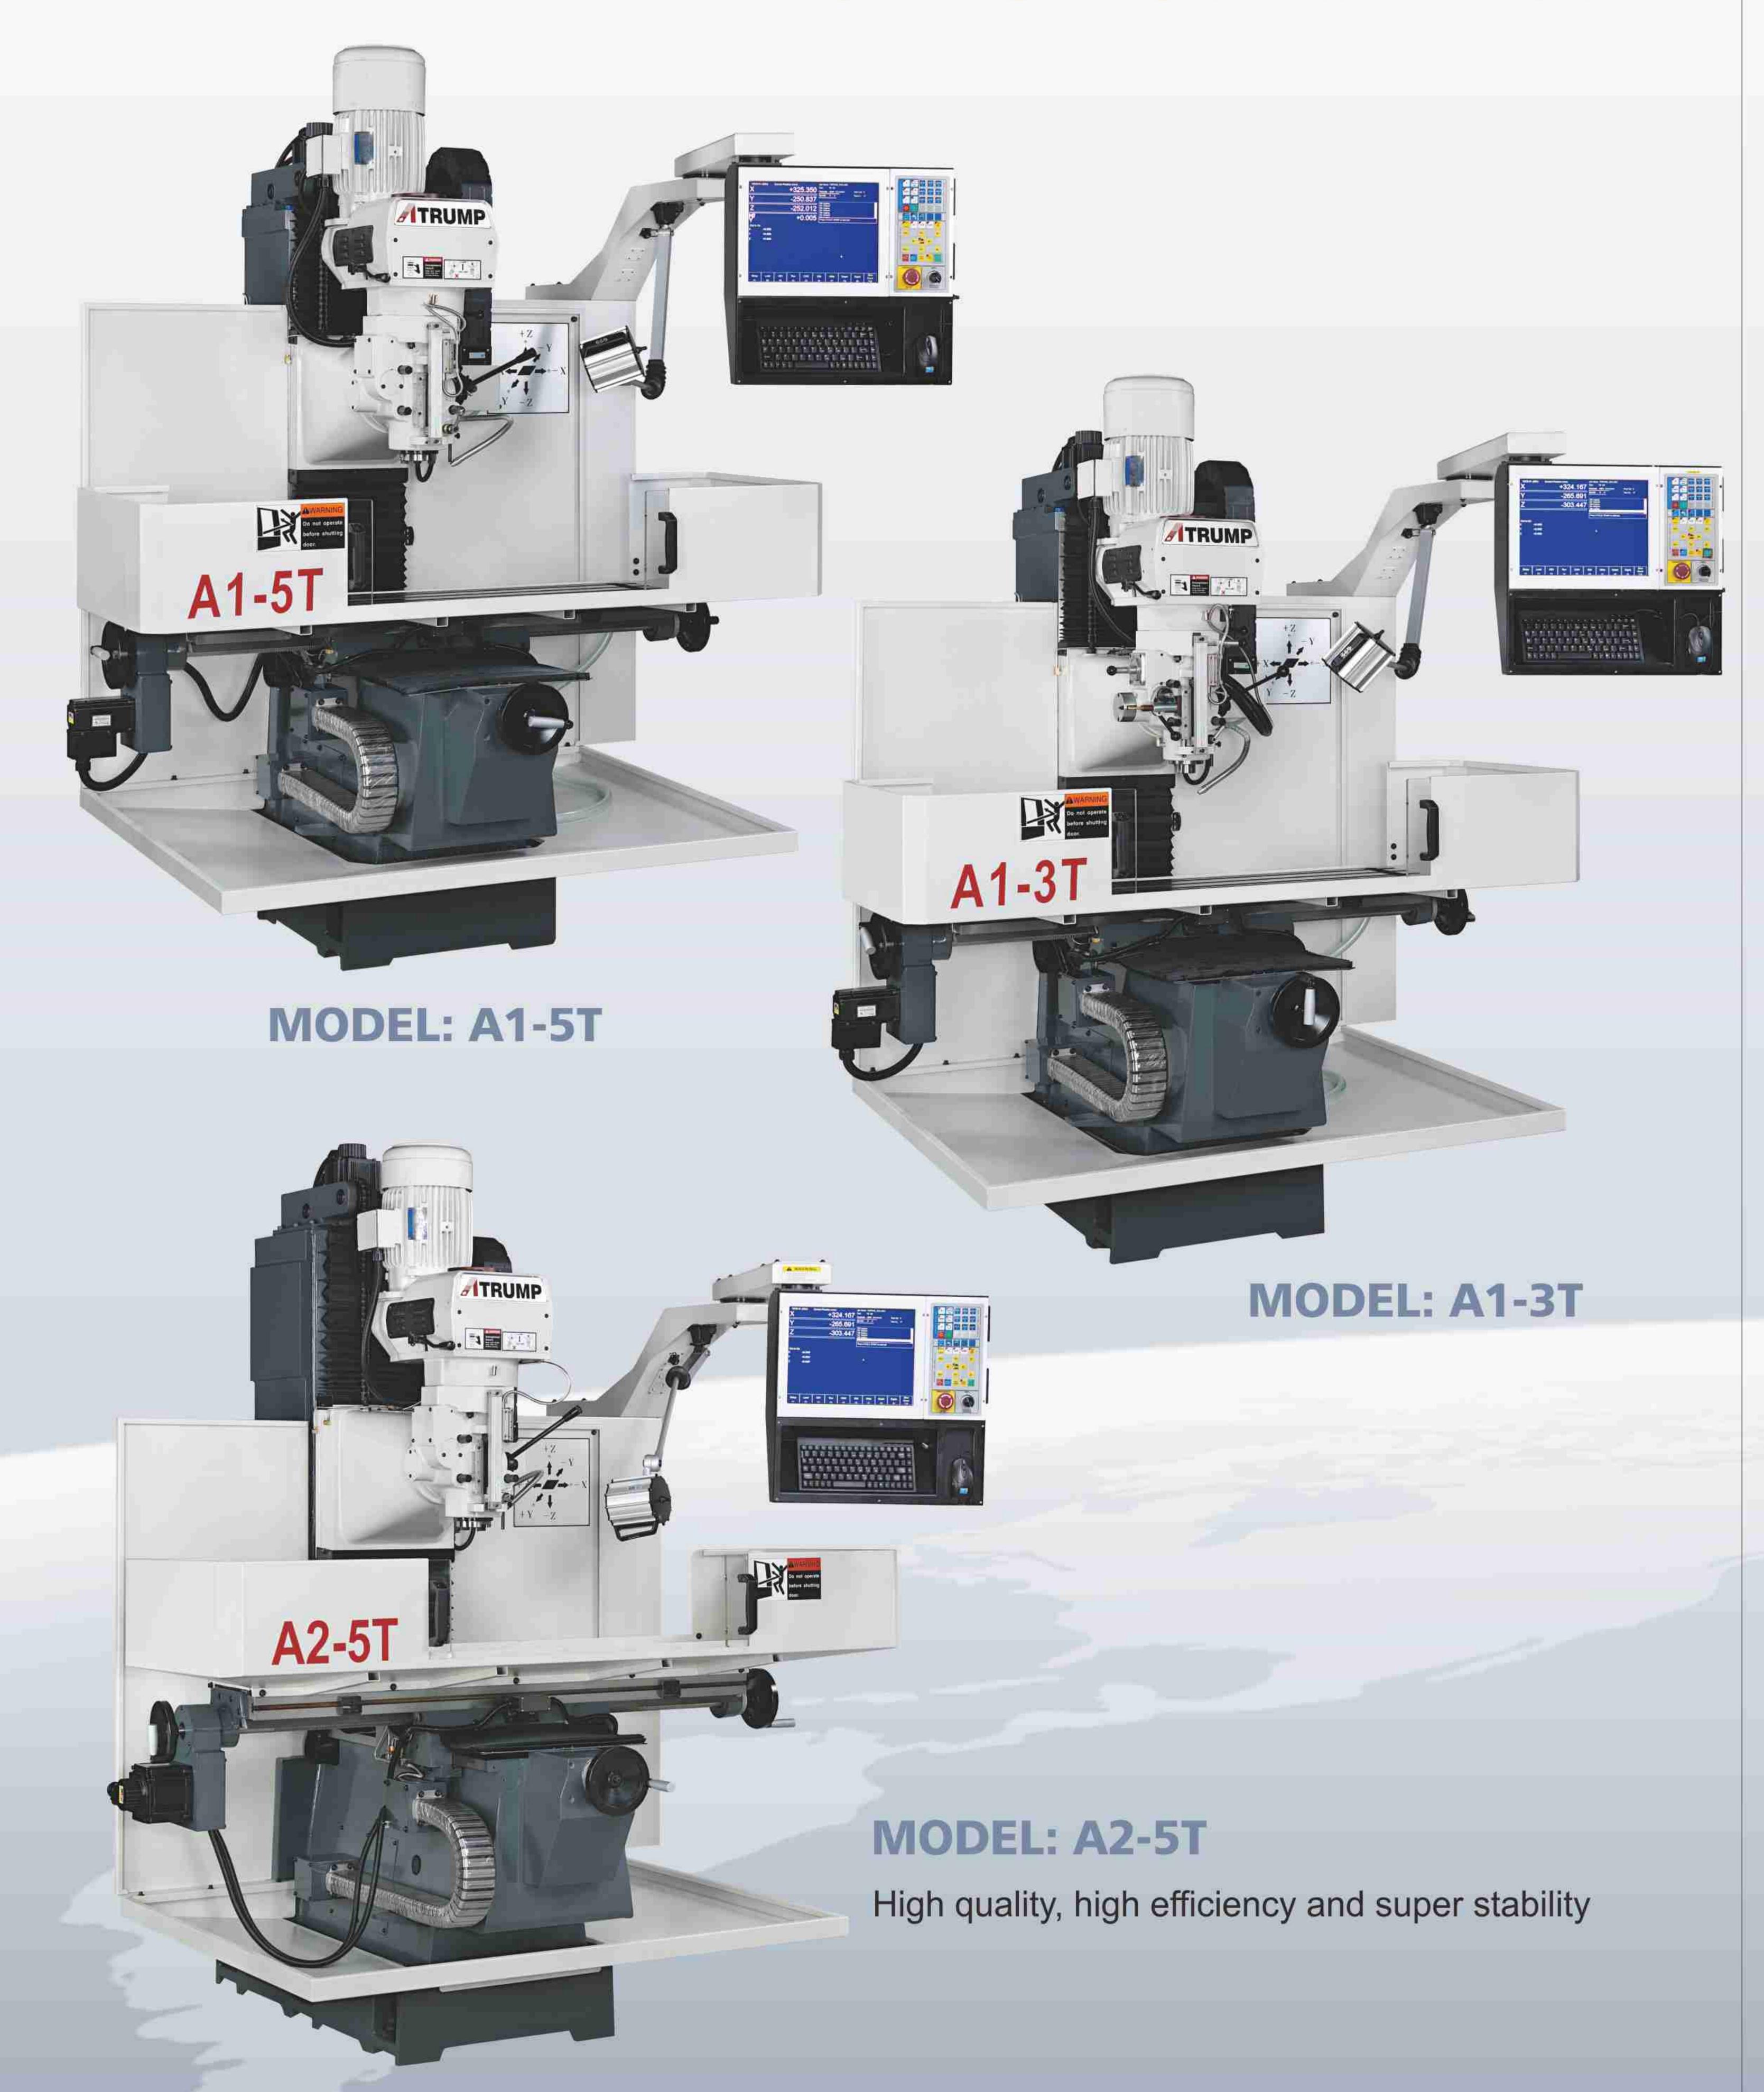



Every machine comes out with ATRUMP's professional design and excellent quality

THE EXCELLENT MACHINE
THE EXCELLENT MACHINE

ATRUMP MACHINERY INC.

Solid, stable with high capacity meet your requirement

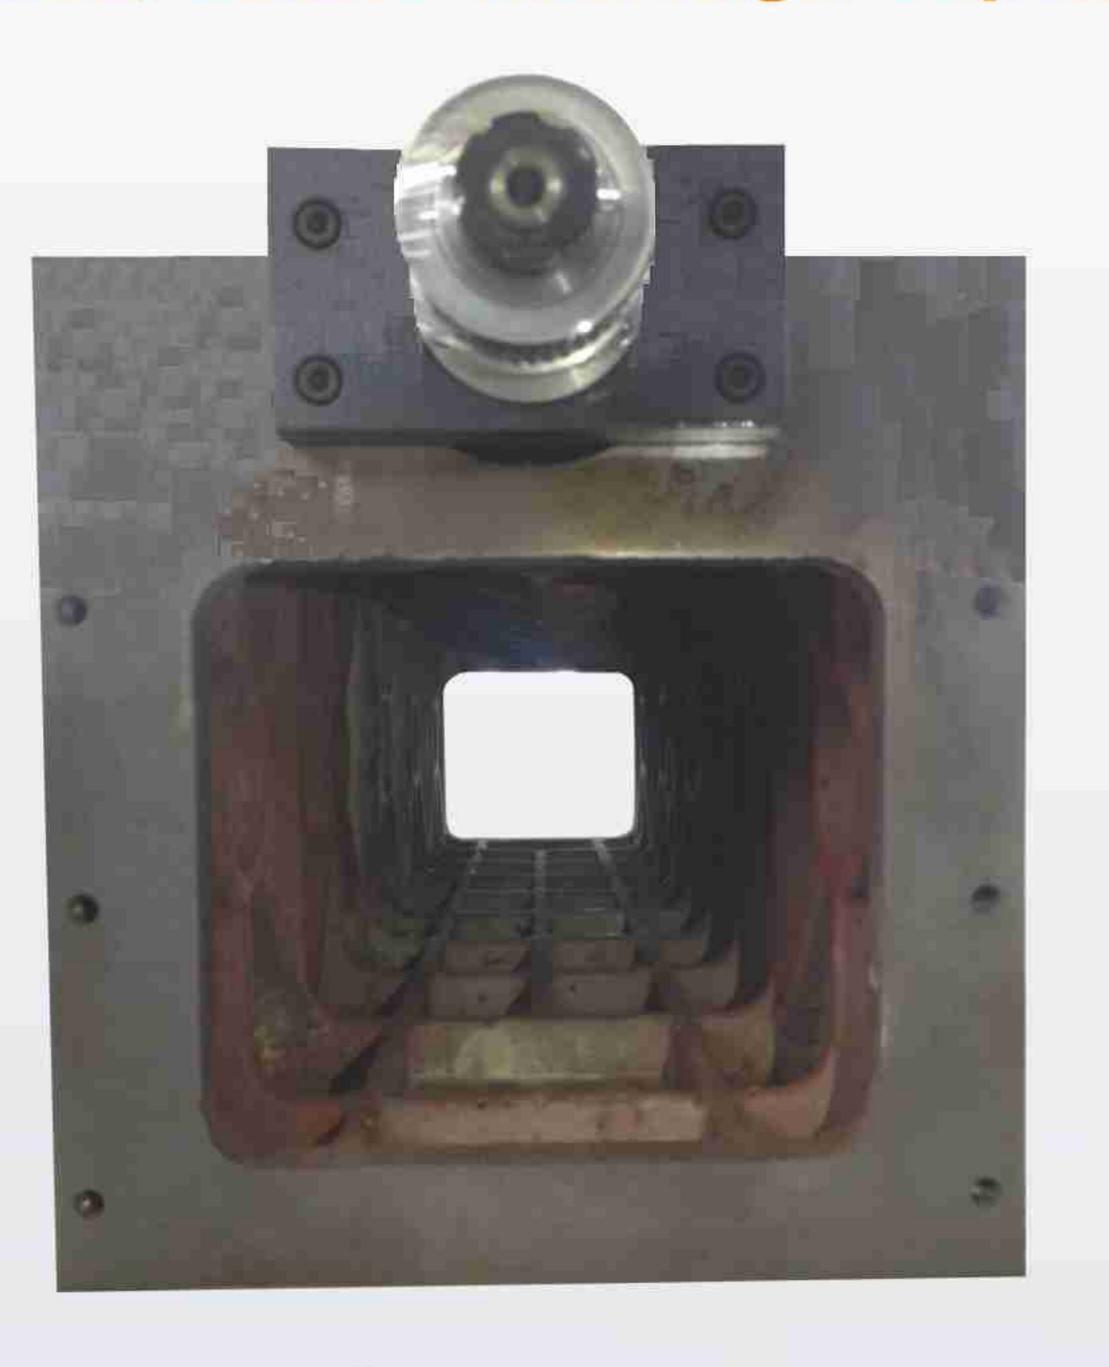

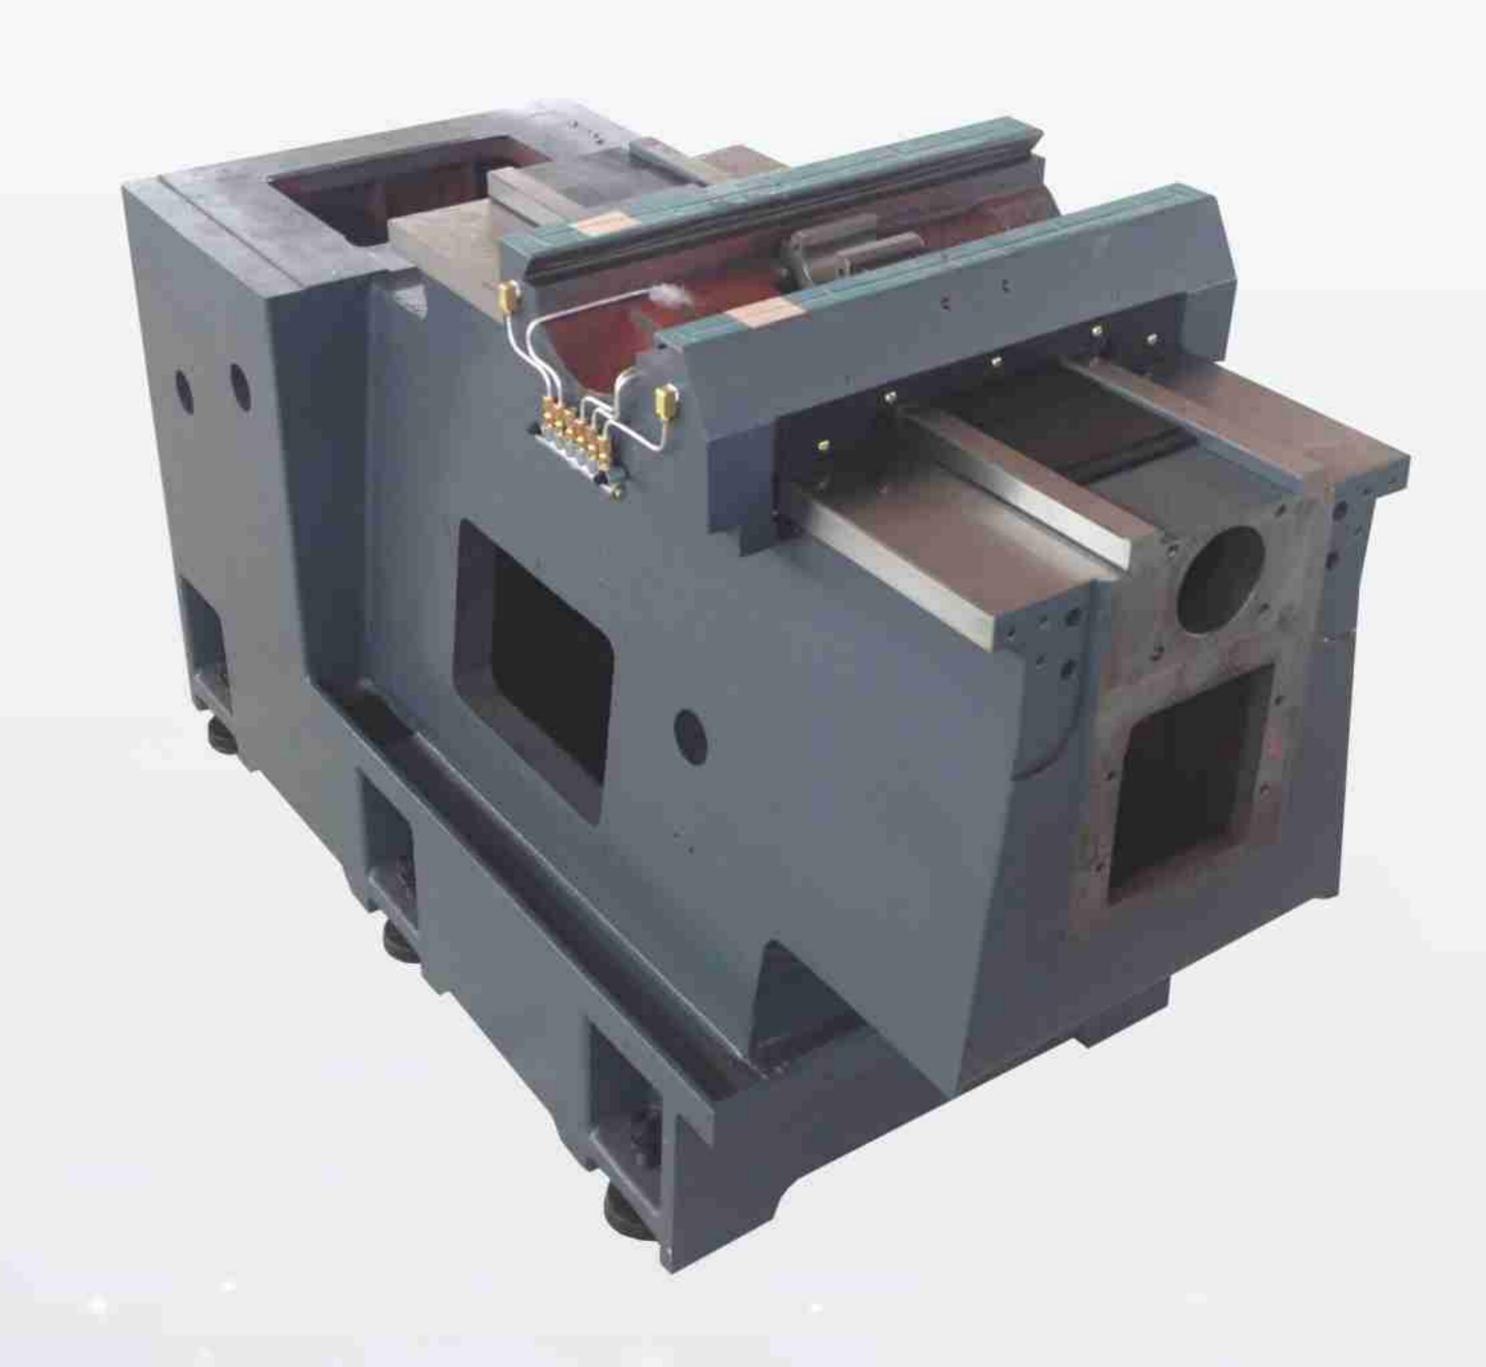

FEATURES:

- *High quality and rigidity Meehanite casting with enforce rib construction design. Also with annealed and stress relieved for long term reliability.
- * High grade Turcite-B fitted to XYZ slide way. Heavy duty box way provides maximum rigidity and stability.
- *Installation Z axis counter balance system to ensure Z axis movement stability and accuracy.
- *Large saddle size has high loading and stability to show the efficiency of large workpiece and heavy cutting.
- *Armless 16 ATC is only available for H model.
- *Auto centralized lubrication system gives proper pressure of oil feeding and discharge.
- *Laser inspection on all three axes eliminates ball screw backlash and provides opimum accuracy during performance.
- *Ball bar parameter testing is performed on all machines to ensure precision fine tuning and proportional three dimensional accuracy.



P4 angular contact spindle bearing limits the temperature variations even for long period of high speed cutting.



C5 double nut precision ball screws hardened and ground for high accuracy and long lasting.





Full enclosure (optional)